
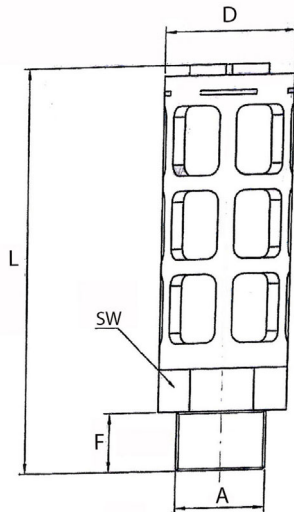


Mit Filterelement aus Polyethylen

 Betriebsdruck: 0 - 6 bar  
 Betriebstemperatur: 5 °C bis 80 °C


SD14PE

**Kunststoff-Schalldämpfer, mit Filterelement aus Polyethylen**

Artikel Nr.	Typen Nr.	Gewinde A	F mm	D mm	S1 mm	SW mm	L mm
156497	SD5PE	M5	4,5	8,0	-	-	19,0
156498	SD18PE	G 1/8	7,0	16,0	8,0	14	40,3
156499	SD14PE	G 1/4	10,8	21,0	12,0	18	65,0
156500	SD38PE	G 3/8	13,0	25,0	14,5	21,5	83,5
156501	SD12PE	G 1/2	14,0	30,0	19,0	26	94,3
156502	SD34PE	G 3/4	16,0	45,5	29,5	31,5	115,0
156503	SD1PE	G 1	18,0	45,5	29,5	35,5	117,6