


Plug amplifier

for »posiflow« proportional control valves



Art. No. 101650

Type No. PV 2920

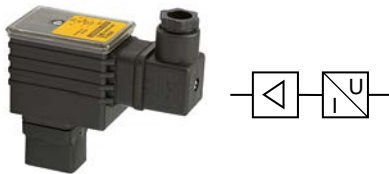

Exemplary illustration

For converting the 0 to 10 V, 0 to 20 mA or 4 to 20 mA standard signal (settable) to an impressed current (0 to 1 A).
 The impressed current is pulse width modulated to ensure low-hysteresis, thermally stable control.
 With settable time ramp (ON/OFF, 0.1 to 3 s).
 The minimum and maximum supply current for the solenoid can be set according to the control signals.

Technical data

Housing	PA
For types	G 1/4, G 3/8
Temperature range	-10 to 75 °C
Operating voltage	24 V DC
Min. temperature range	-10 °C
Max. temperature range	75 °C

Commercial data

Customs tariff number	84818079
Country of origin	DE
eCl@ss 5.1.4	27299220
eCl@ss 9.0	27299220
UNSPSC_Code_v190501	27131614
UNSPSC_CodeDesc_v190501	Pneumatic adapters



