


# 3/2-way solenoid valve

3/2-way type

**MAX** |||

Art. No. 102964

Type No. MV 3212

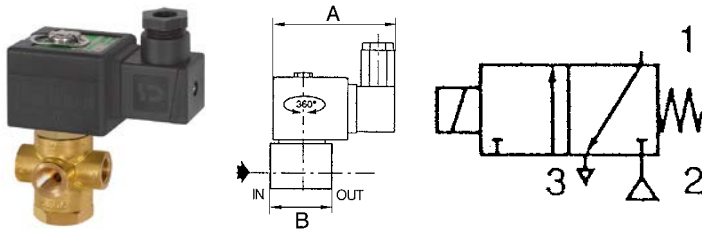

Exemplary illustration

For all applications with compressed air, neutral gases or low-viscosity, neutral media.

## Technical data

Housing	brass
Valve seat	brass
Internal parts	stainless steel
Protection IP	IP 65 (with connector socket fitted)
Type	10
Function	normally closed (NC)
Thread	Rp 1/4
DN	3,2 mm
Operating pressure	0 - 6 bar
Sealant	NBR
Electrical connection	for connector socket PG 11 P acc. to ISO 4400
Medium temperature	-20 to 90 °C
Ambient temperature	-20 to 75 °C
Standard thread	ISO 7-1
A	80 mm
B	43 mm

## Commercial data

Customs tariff number	84812090
Country of origin	NL
eCl@ss 5.1.4	27220601
eCl@ss 9.0	27220601
UNSPSC_Code_v190501	40141605
UNSPSC_CodeDesc_v190501	Solenoid valves

## Material informations

REACH SVHC1 substance name	lead
CAS no. SVHC 1	7439-92-1
RoHS materials notice	RoHS compliant
REACH Info	contains SVHC substance











