

## Mini mist oiler



Art. No. 137701

Type No. MNOG14.10B



Exemplary illustration

For mounting on pneumatic impact tools (nail drivers, tackers, screwdrivers) which work intermittently. Also suitable for tools with continuous compressed air demand (grinding and polishing machines).

Fixed drip rate: Approx. 0.4 cm<sup>3</sup> per 100 work cycles, one filling = 3000 work cycles.

Discontinued product. No longer available. New product 150086 (MNOG14.10B.H)

### Technical data

|                         |                                |
|-------------------------|--------------------------------|
| Max. operating pressure | 10 bar                         |
| Medium temperature      | 0 to 50 °C                     |
| Ambient temperature     | 0 to 50 °C                     |
| Thread                  | G 1/4                          |
| DN                      | 6                              |
| Oil bowl                | polycarbonate                  |
| Flow direction          | any                            |
| Mounting position       | oil intake at the lowest point |
| A                       | 33.0 mm                        |
| B                       | 67.0 mm                        |
| Weight                  | 87.0 g                         |

We recommend our special pneumatic oil (Art. No. 101135)


## Commercial data

|                         |                       |
|-------------------------|-----------------------|
| Customs tariff number   | 84248970              |
| Country of origin       | DE                    |
| eCl@ss 5.1.4            | 27293201              |
| eCl@ss 9.0              | 27293201              |
| UNSPSC_Code_v190501     | 27131604              |
| UNSPSC_CodeDesc_v190501 | Pneumatic lubricators |

## Material informations

|                            |                         |
|----------------------------|-------------------------|
| REACH SVHC1 substance name | lead                    |
| CAS no. SVHC 1             | 7439-92-1               |
| RoHS materials notice      | RoHS compliant          |
| REACH Info                 | contains SVHC substance |

## Dimensions

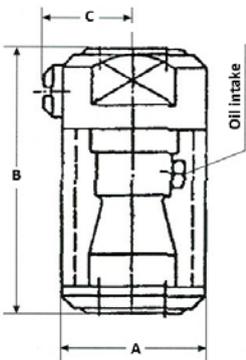

| Thread | DN | A<br>mm | B<br>mm | C<br>mm |
|--------|----|---------|---------|---------|
| G 1/4  | 6  | 33.0    | 67.0    | 22.0    |

## Accessories

|   | Art. No. | Type No. |
|---|----------|----------|
| Pneumatic special oil, in canister 2.5 litre, Suitable for use in a temperature range from -35 °C to 85 °C, incl. box and docu. | 101135   | 32       |