

## Straight screw-in fitting

stainless steel 1.4571 (DIN 2353)

### STAINLESS STEEL

Art. No. 148694

Type No. ES 36-ZW-2



Exemplary illustration

Version with parallel thread and FKM seal.

Suitable for compressed air, liquids, natural gas and hydraulics.

Not suitable for nitrogen, oxygen, helium, hydrogen or welding gases!


### Technical data

|                   |                        |
|-------------------|------------------------|
| Temperature range | -20 to 200 °C          |
| Material          | stainless steel 1.4571 |
| Sealant           | FKM                    |
| PN                | 315 bar                |
| L1                | 39,5 mm                |
| L2                | 12 mm                  |

### Commercial data

|                         |                    |
|-------------------------|--------------------|
| Customs tariff number   | 73072910           |
| Country of origin       | SK                 |
| eCl@ss 5.1.4            | 27294202           |
| eCl@ss 9.0              | 27294202           |
| UNSPSC_Code_v190501     | 27131614           |
| UNSPSC_CodeDesc_v190501 | Pneumatic adapters |

## Dimensions

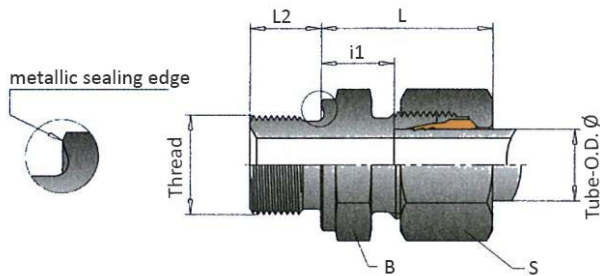

| Tube O.D. | Thread   | L1   | L2 | L    | S  | B  | i1   |
|-----------|----------|------|----|------|----|----|------|
| mm        |          | mm   | mm | mm   | mm | mm | mm   |
| 12        | G 3/8 ET | 39,5 | 12 | 27,5 | 22 | 22 | 12,5 |