

Distributor, acetylene

Art. No. 149985

Type No. VT.C2H2.38L



Exemplary illustration

The gas distributors consist of two individually lockable outlets and metal handwheels. For connecting two consumption points (burners) per cylinder or tapping point. Outlet angled downwards.


Technical data

Material	brass
Thread 1	G 3/8 LH IT
Thread 2	G 3/8 LH ET
Gas type	fuel gas

Commercial data

Customs tariff number	74122000
Country of origin	TR
eCl@ss 5.1.4	37010201
eCl@ss 9.0	27440202
UNSPSC_Code_v190501	23271700
UNSPSC_CodeDesc_v190501	Welding and soldering and brazing accessories

Dimensions

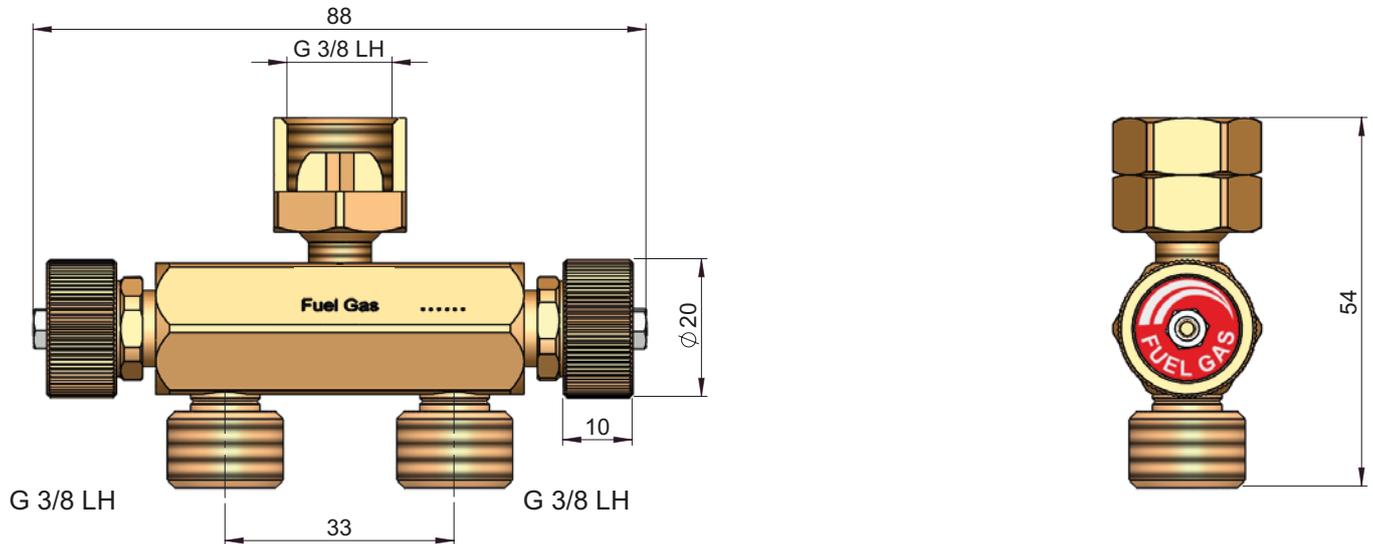

Standards

DIN EN ISO 560, DIN EN ISO 9090, DIN EN ISO 9539

Accessories

	Art. No.	Type No.
Hexagonal coupling nut G 3/8 left sleeve size I.D.4, I.D.6, I.D.9 Brass, Max. working pressure 25 bar, Max. operating temp. 150 °C	137631	MS234LH38469
Hose sleeve with ball nipple, for hose I.D. 6, Brass, Max. working pressure 25 bar, Max. operating temp. 150°C	134895	MS2363806