

Distributor, acetylene

Art. No. 149986

Type No. VT.C2H2.38L.9



Exemplary illustration

The gas distributors consist of two individually lockable outlets and metal handwheels. For connecting two consumption points (burners) per cylinder or tapping point. Outlet angled downwards.


Technical data

| | |
|----------|-------------|
| Material | brass |
| Thread 1 | G 3/8 LH IT |
| Thread 2 | G 3/8 LH ET |
| Gas type | fuel gas |

Commercial data

| | |
|-------------------------|---|
| Customs tariff number | 74122000 |
| Country of origin | TR |
| eCl@ss 5.1.4 | 37010201 |
| eCl@ss 9.0 | 27440202 |
| UNSPSC_Code_v190501 | 23271700 |
| UNSPSC_CodeDesc_v190501 | Welding and soldering and brazing accessories |

Dimensions

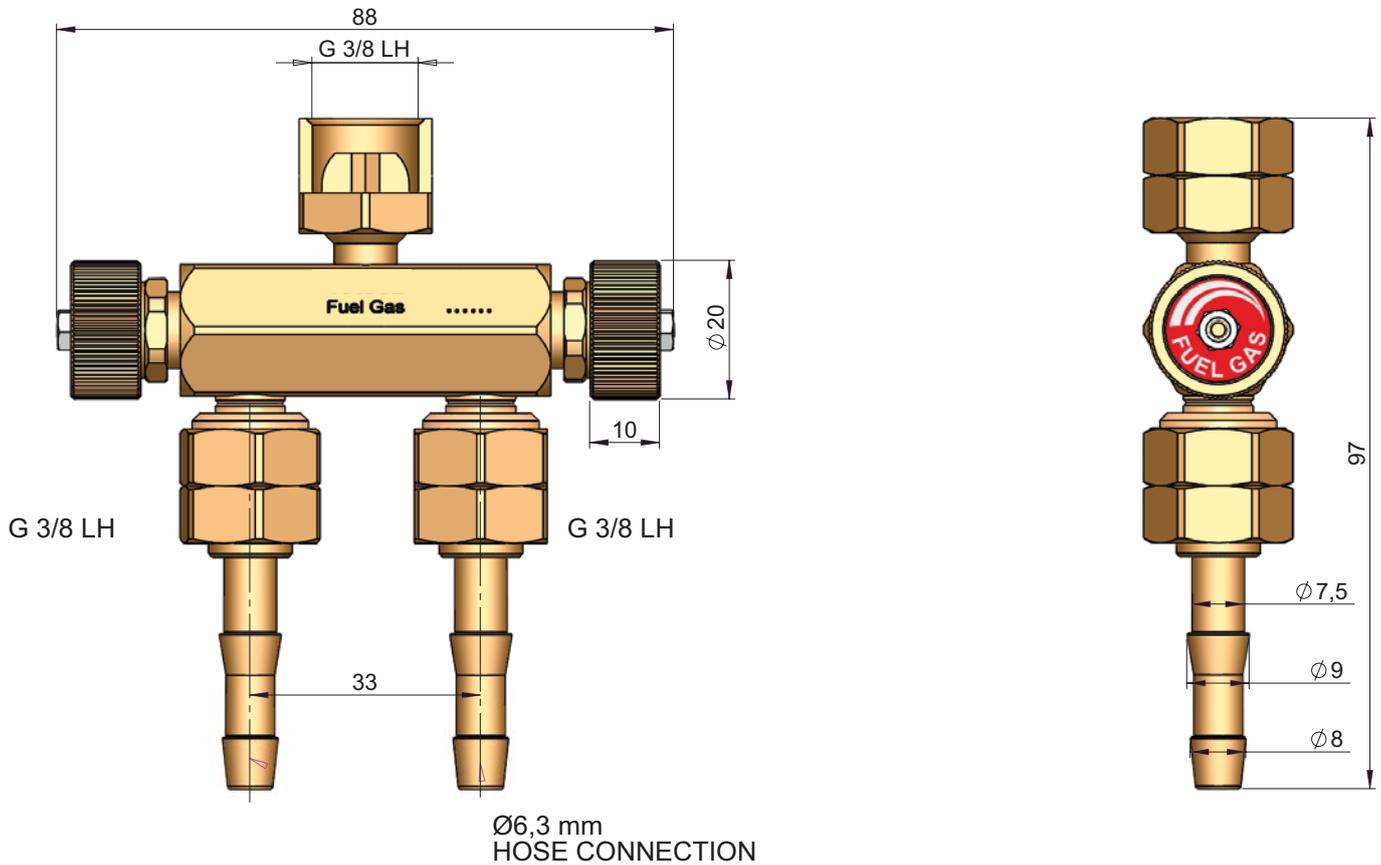

Standards

DIN EN ISO 560, DIN EN ISO 9090, DIN EN ISO 9539

Spareparts

| | Art. No. | Type No. |
|--|----------|--------------|
| Hexagonal coupling nut G 3/8 left sleeve size I.D.4, I.D.6, I.D.9 Brass, Max. working pressure 25 bar, Max. operating temp. 150 °C | 137631 | MS234LH38469 |