Multi-pole cable

Art. No. **153733**

Type No. **02269B0100**



Exemplary illustration

Commercial data

eCl@ss 5.1.4	27291501
eCl@ss 9.0	27291390
UNSPSC_Code_v190501	40141603
UNSPSC_CodeDesc_v190501	Pneumatic valves

Material informations

RoHS materials notice	RoHS compliant
REACH Info	no SVHC substance included

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
07.11.2025 The specified data do not represent legally guaranteed properties.

ACCESSORIES

IP65 25-PIN PRE-WIRED PLUG CONNECTOR

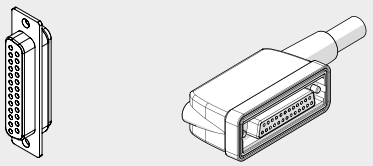

Code	Description	Weight [g]
02269A0100	IP65 25-pin 90° connector, UL cable L = 1 m	180
02269A0250	IP65 25-pin 90° connector, UL cable L = 2.5 m	365
02269A0500	IP65 25-pin 90° connector, UL cable L = 5 m	680
02269A1000	IP65 25-pin 90° connector, UL cable L = 10 m	1220
02269A2000	IP65 25-pin 90° connector, UL cable L = 20 m	2350
02269C0100 **	IP65 25-pin 90° connector, UL H-FLEX CL6, cable L = 1 m	180
02269C0250 **	IP65 25-pin 90° connector, UL H-FLEX CL6, cable L = 2.5 m	365
02269C0500 **	IP65 25-pin 90° connector, UL H-FLEX CL6, cable L = 5 m	680
02269C1000 **	IP65 25-pin 90° connector, UL H-FLEX CL6, cable L = 10 m	1220

** Very flexible cables, class 6 according to IEC 60228

Position of electrical contact	Colour of the corresponding wire	Function
1	White	Out 1
2	Brown	Out 2
3	Green	Out 3
4	Yellow	Out 4
5	Grey	Out 5
6	Pink	Out 6
7	Blue	Out 7
8	Red	Out 8
9	Black	Out 9
10	Violet	Out 10
11	Grey + Pink ring	Out 11
12	Red + Blue ring	Out 12
13	White + Green ring	Out 13
14	Brown + Green ring	Out 14
15	White + Yellow ring	Out 15
16	Yellow + Brown ring	Out 16
17	White + Grey ring	Out 17
18	Grey + Brown ring	Out 18
19	White + Pink ring	Out 19
20	Pink + Brown ring	Out 20
21	White + Blue ring	Out 21
22	Brown + Blue ring	Fault reporting
23	White + Red ring	Config. PNP/NPN *
24	Brown + Red ring	+VDC
25	White + Black ring	0VDC

* Connect to +VDC if (Out) valves with a POSITIVE signal are to be controlled
Connect to 0VDC if (Out) valves with a NEGATIVE signal are to be controlled

IP65 44-PIN PRE-WIRED PLUG CONNECTOR

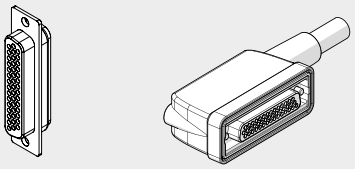

Code	Description	Weight [g]
02269B0100	IP65 44-pin 90° connector, UL cable L = 1 m	275
02269B0250	IP65 44-pin 90° connector, UL cable L = 2.5 m	630
02269B0500	IP65 44-pin 90° connector, UL cable L = 5 m	1180
02269B1000	IP65 44-pin 90° connector, UL cable L = 10 m	2210
02269B2000	IP65 44-pin 90° connector, UL cable L = 20 m	4340
02269D0100 **	IP65 44-pin 90° connector, UL H-FLEX CL6, cable L = 1 m	275
02269D0250 **	IP65 44-pin 90° connector, UL H-FLEX CL6, cable L = 2.5 m	630
02269D0500 **	IP65 44-pin 90° connector, UL H-FLEX CL6, cable L = 5 m	1180
02269D1000 **	IP65 44-pin 90° connector, UL H-FLEX CL6, cable L = 10 m	2210

** Very flexible cables, class 6 according to IEC 60228

Position of electrical contact	Colour of the corresponding wire	Function
1	White	Out 1
2	Brown	Out 2
3	Green	Out 3
4	Yellow	Out 4
5	Grey	Out 5
6	Pink	Out 6
7	Blue	Out 7
8	Red	Out 8
9	Black	Out 9
10	Violet	Out 10
11	Grey + Pink ring	Out 11
12	Red + Blue ring	Out 12
13	White + Green ring	Out 13
14	Brown + Green ring	Out 14
15	White + Yellow ring	Out 15
16	Yellow + Brown ring	Out 16
17	White + Grey ring	Out 17
18	Grey + Brown ring	Out 18
19	White + Pink ring	Out 19
20	Pink + Brown ring	Out 20
21	White + Blue ring	Out 21
22	Brown + Blue ring	Out 22
23	White + Red ring	Out 23
24	Brown + Red ring	Out 24
25	White + Black ring	Out 25
26	Brown + Black ring	Out 26
27	Grey + Green ring	Out 27
28	Yellow + Grey ring	Out 28
29	Pink + Green ring	Out 29
30	Yellow + Pink ring	Out 30
31	Green + Blue ring	Out 31
32	Yellow + Blue ring	Out 32
33	Green + Red ring	Out 33
34	Yellow + Red ring	Out 34
35	Green + Black ring	Out 35
36	Yellow + Black ring	Out 36
37	Grey + Blue ring	Out 37
38	Pink + Blue ring	Out 38
39	Grey + Red ring	Fault reporting
40	Pink + Red ring	Config. PNP/NPN *
41	Grey + Black ring	+VDC
42	Pink + Black ring	+VDC
43	Blue + Black ring	0VDC
44	Red + Black ring	0VDC

* Connect to +VDC if (Out) valves with a POSITIVE signal are to be controlled
Connect to 0VDC if (Out) valves with a NEGATIVE signal are to be controlled

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
07.11.2025 The specified data do not represent legally guaranteed properties.

SPARE PARTS

EB 80 ELECTRICAL CONNECTION INTERFACE OR SEAL



Code	Description
02282R1003	EB 80 electrical connection interface OR seal
	Comes in 10-pc. packs

NOTES

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
07.11.2025 The specified data do not represent legally guaranteed properties.