


M12 female connector straight

Art. No. 153740

Type No. 0240009055



Exemplary illustration

Commercial data


eCl@ss 5.1.4	27291501
eCl@ss 9.0	27291390
UNSPSC_Code_v190501	40141603
UNSPSC_CodeDesc_v190501	Pneumatic valves

Material informations

REACH SVHC1 substance name	lead
CAS no. SVHC 1	7439-92-1
RoHS materials notice	RoHS compliant
REACH Info	contains SVHC substance

ACCESSORIES


M12 FEMALE CONNECTOR FOR BUS-IN, A ENCODING



Code	Description
0240009055	M12 5-pin female connector, encoding A

Note: Can be used for Bus CANopen and IO-Link


M12 MALE CONNECTOR FOR BUS-IN, A ENCODING



Code	Description
0240009038	M12 5-pin male connector, encoding A

Note: Can be used for Bus CANopen


M12 FEMALE CONNECTOR FOR BUS-IN, B ENCODING



Code	Description
0240009036	M12 5-pin female connector, encoding B

Note: Can be used for Profibus-DP


M12 MALE CONNECTOR FOR BUS-IN, B ENCODING



Code	Description
0240009035	M12 5-pin male connector, encoding B

Note: Can be used for Profibus-DP


M12 BUS CONNECTOR, D ENCODING



Code	Description
0240005051	M12 4-pin BUS connector, D-coded


Note: Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP, Ethernet POWERLINK, CC-Link IE Field Basic)

STRAIGHT CONNECTOR FOR M12-M12 BUS, D-CODED



Code	Description
0240005103	Straight connector for M12-M12 4-pin BUS, D-coded, with 3 m cable
0240005105	Straight connector for M12-M12 4-pin BUS, D-coded, with 5 m cable
0240005110	Straight connector for M12-M12 4-pin BUS, D-coded, with 10 m cable

Note: Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP, Ethernet POWERLINK, CC-Link IE Field Basic)

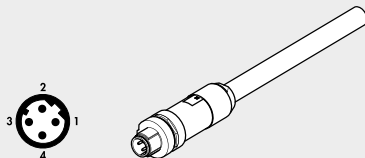STRAIGHT CONNECTOR FOR M12 BUS, D-CODED


Pin	Cable color
1	Yellow
2	White
3	Red
4	Blue


Code	Description
0240005093	Straight connector for M12 4-pin BUS, D-coded, with 3 m cable
0240005095	Straight connector for M12 4-pin BUS, D-coded, with 5 m cable
0240005100	Straight connector for M12 4-pin BUS, D-coded, with 10 m cable

Note: Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP, Ethernet POWERLINK, CC-Link IE Field Basic)

STRAIGHT CONNECTOR FOR M12, A-CODED


Code	Description
W0970513001	5-PIN M12x1 straight connector

Note: Can be used for IO-Link

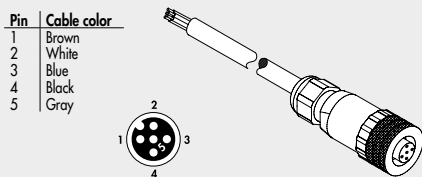STRAIGHT CONNECTOR WITH WIRE FOR M12, A-CODED


Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Gray


Code	Description
W0970513002	5-PIN M12x1 straight connector with wire L = 5 m

Note: Can be used for IO-Link

90° CONNECTOR FOR M12, A-CODED


Code	Description
W0970513003	M12x1 5-PIN 90° connector


Note: Can be used for IO-Link

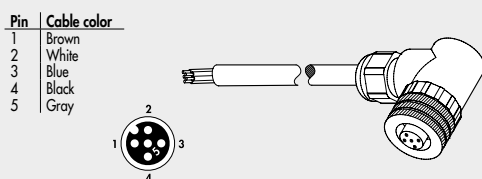90° CONNECTOR WITH WIRE FOR M12, A-CODED


Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Gray

Code	Description
W0970513004	M12x1 5-PIN 90° connector with wire L = 5 m

Note: Can be used for IO-Link

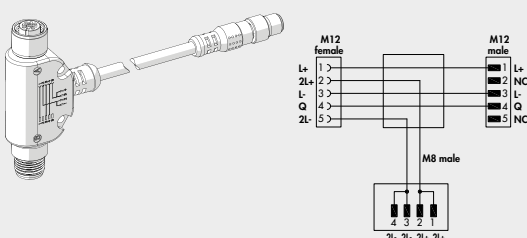T-CONNECTOR M12 A-CODED / M8 MALE FOR AUXILIARY POWER


Code	Description
0240009070	T - connector for auxiliary power

Note: Can be used for IO-Link 64 OUT

B2

VALVES

EB 80 - ELECTRICAL CONNECTION WITH FIELDBUS - E


CABLE FOR BUS



Code	Description
0240005220*	Cable for BUS 20 m
0240005250	Cable for BUS CANopen BUS 20 m

* Can be used for BUS units in the EtherNet family (Profinet IO, EtherCAT, EtherNet/IP, Ethernet POWERLINK, CC-Link IE Field Basic)


RJ45 CONNECTOR



Code	Description
0240005050	RJ45 connector with 4 contacts according to IEC 60603-7

M8 CONNECTOR FOR POWER SUPPLY

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black



Code	Description
0240009060	M8 4-pin female connector for power supply, cable L = 3 m
0240009037	M8 4-pin female connector for power supply, cable L = 5 m
0240009058	M8 4-pin female connector for power supply, cable L = 10 m
0240009059	M8 4-pin female connector for power supply, cable L = 15 m
0240009P60 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 3 m
0240009P37 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 5 m
0240009P58 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 10 m
0240009P59 *	M8 4-pin female connector for power supply, H-FLEX CL6, cable L = 15 m

* Very flexible cables, class 6 according to IEC 60228


M8-M12 PLUG



Code	Description
0240009039	Plug for M8 connector
0240009040	Plug for M12 connector

SPARE PARTS


EB 80 ELECTRICAL CONNECTION INTERFACE OR-SEAL



Code	Description
02282R1003	EB 80 electrical connection interface or-seal

Comes in 10-pc. packs

GASKET BETWEEN EB 80 BASE AND COVER BUS/SIGNALS



Code	Description
02282R1004	Kit of gaskets between EB 80 base and cover bus/signals

Comes in 10-pc. packs

EB 80 BUS/SIGNAL INTERFACE OR-SEAL



Code	Description
02282R1005	EB 80 BUS/Signal interface OR-seal

Comes in 10-pc. packs

B2.46