


GEKA hose piece

GEKA-plus series, lead-free brass, with KTW approval



Art. No. 154158

Type No. MB.K 111-KTW



Exemplary illustration

GEKA couplings for potable water, lead-free brass, with KTW approval.


Technical data

Max. operating pressure	40 bar
Medium temperature	-10 to 90 °C
Ambient temperature	-10 to 90 °C
Sealant	EPDM for potable water
KTW approval	after D2 and long-term test results DVGW W270
Connection	G 3/4 IT

Commercial data

Customs tariff number	74122000
Country of origin	CN
eCl@ss 5.1.4	37110390
eCl@ss 9.0	37110390
UNSPSC_Code_v190501	40141734
UNSPSC_CodeDesc_v190501	Hose fitting

Dimensions

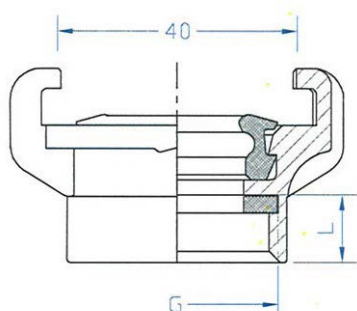

Connection	L mm
G 3/4 IT	10.5

Spareparts

	Art. No.	Type No.
Sealing ring, EPDM blue, for couplings of series GEKA-plus, lead-free brass, with KTW approval, temperature range -10 °C to 90 °C	154170	MB.D 300
Flat sealing ring, EPDM blue, for couplings of series GEKA-plus with female thread, lead-free brass, 26 x 18 x 2	154172	MB.FDREPDm26 18