

Handle



Art. No. 155092

Type No. GS.V.R.K.38



Exemplary illustration


Technical data

Material	brass, plastic
Thread 1	M20x1.0 ET
Thread 2	G 3/8 LH ET
Temperature range	-20 to 60 °C
Gas type	propane
Max. operating pressure	4 bar
Standard	acc. to EN ISO 9012
For hose	I.D. 6 mm

Commercial data

Customs tariff number	84682000
Country of origin	TR
eCl@ss 5.1.4	21080101
eCl@ss 9.0	21080190
UNSPSC_Code_v190501	23271700
UNSPSC_CodeDesc_v190501	Welding and soldering and brazing accessories

Dimensions

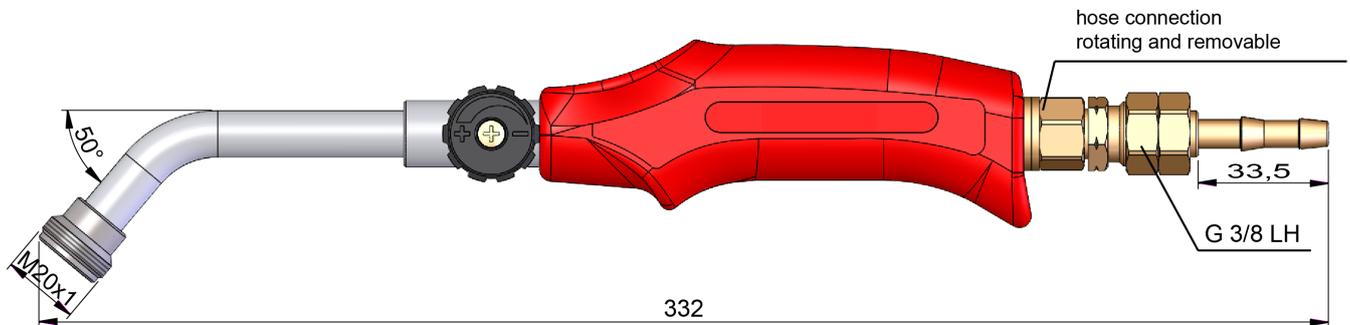

Product informations

Features:

- Compact and lightweight design
- Ergonomically designed
- Removable hose connection

Accessories

	Art. No.	Type No.
Burner insert, Ø17 mm, connection M20x1, flame length 3 cm	155102	BE.17.3
Burner insert, Ø19 mm, connection M20x1, flame length 4.5 cm	155103	BE.20.4,5
Burner insert, Ø22 mm, connection M20x1, flame length 25 cm	155104	BE.22.25

Spareparts

	Art. No.	Type No.
Hose sleeve with ball nipple, for hose I.D. 6, Brass, Max. working pressure 25 bar, Max. operating temp. 150°C	134895	MS2363806
Hexagonal coupling nut G 3/8 left sleeve size I.D.4, I.D.6, I.D.9 Brass, Max. working pressure 25 bar, Max. operating temp. 150 °C	137631	MS234LH38469