


Material: Messing vernickelt
 max. Betriebsdruck: 18 bar
 max. Betriebstemperatur: 200 °C
 verwendbare Schläuche: PA, PE, PU

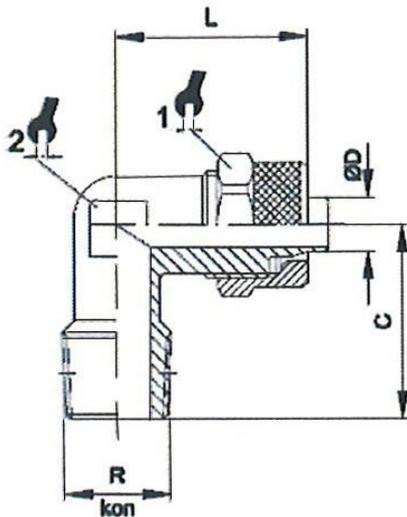

13.114-8-E

Winkelschraubverschraubung, Außengewinde konisch (ohne O-Ring)

Typen Nr.	Artikel Nr.	ØD	A	B	C	L			O-Ring
13.118-6-E	115214	6/4	R 1/8	8,0	17,0	22,5	12	8	ohne
13.118-8-E	115215	8/6	R 1/8	8,0	17,0	22,5	14	10	ohne
13.118-10-E	115213	10/8	R 1/8	8,0	18,5	25,5	16	11	ohne
13.114-6-E	115211	6/4	R 1/4	11,0	20,0	22,5	12	10	ohne
13.114-8-E	115212	8/6	R 1/4	11,0	20,0	22,5	14	10	ohne
13.114-10-E	115210	10/8	R 1/4	11,0	21,5	25,5	16	11	ohne
13.138-6-E	115218	6/4	R 3/8	11,5	22,5	23,5	12	11	ohne
13.138-8-E	115219	8/6	R 3/8	11,5	22,5	24,0	14	11	ohne
13.138-10-E	115216	10/8	R 3/8	11,5	22,5	25,5	16	11	ohne
13.138-12-E	115217	12/10	R 3/8	11,5	24,5	30,0	18	14	ohne