


Proportional precision pressure regulator

REGTRONIC series

MAX

Art. No. 152340

Type No. 5530502

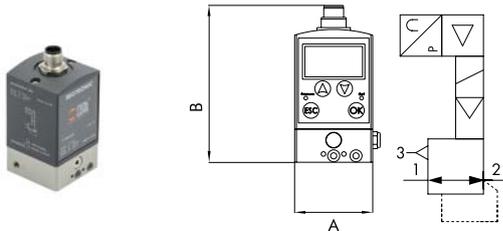

Exemplary illustration

Proportional precision pressure regulators series REGTRONIC have the job of precisely regulating the pressure in a system, the variables depending on the input command. Remote control regulators are controlled by means of an M12x1 cable and connector and can have Volt, mA, RS232 control or via IO-Link. Regulators with a display can be controlled via a cable or directly using the keys below the display. Pressure control takes place in a 'closed loop' with an electronic precision pressure sensor that measures the downstream pressure, a control system that compares it with the desired pressure, and two mini solenoid valves that adjust the pressure to reach the target value.

Advantages:

- All analogue versions come with the comprehensive, simple and intuitive "MWRregtronic" programming and reading software. This software can be used to set the parameters. It can be downloaded from the website www.metalwork.eu. To connect the PC to REGTRONIC, use the PC connection cable article no. 153061.
- The version with display can show a wide range of information and diagnostics. The user interface with the display, LEDs and buttons are all on one side.
- The wireless versions can communicate with Ethernet networks via the MQTT protocol and with mobile devices via Bluetooth® using the dedicated 'Metal Work RegUp' app.
- The REGTRONIC 300 / REGTRONIC 400 series can be combined at will with the SKILLAIR FRL units.

ATEX version on request!

Technical data

Series	REGTRONIC
Version	IO-Link
Analogue output	without
Display	without
Input signal	IO-Link
Thread	M5 IT
Electrical connection	M12 male connector, 5-pin
Medium	filtered, unlubricated compressed air, max. particle size 10 µm, free of condensate
Min. input pressure	pressure to be regulated +1 bar

Technical data

Max. input pressure	11 bar
Control range	0,05 - 10 bar
Temperature range	0 to 50 °C
Flow rate measurement 1	flow rate at 6.3 bar and Δp 0.5 bar
Flow rate 1	10 NI/min
Flow rate measurement 2	flow rate at 6,3 bar and Δp 1 bar
Flow rate 2	10 NI/min
Hysteresis	$\pm 0,2$ % (full scale)
Repeatability	± 0.2 % (full scale)
Sensitivity/dead-band	adjustment range: 10 - 300 mbar
Temperature characteristics	max. 2 mbar / °C
Supply voltage range	18 to 30 V DC
Operating voltage min.	18 V DC
Operating voltage max.	30 V DC
Max. admissible voltage	32 V DC*
Current consumption	max. 150 mA at 18 V DC
WiFi	without
Compatible with app	no
Mounting position	any
Housing	aluminium
Protection IP	IP 65
A	47 mm
B	88 mm


*IMPORTANT! Voltages above 32 V DC will cause irreparable damage to the system.

Commercial data

Customs tariff number	84811099
Country of origin	IT
eCl@ss 5.1.4	27292301
eCl@ss 9.0	27292301
UNSPSC_Code_v190501	40141603
UNSPSC_CodeDesc_v190501	Pneumatic valves

PROPORTIONAL PRECISION PRESSURE REGULATOR REGTRONIC SERIES

Proportional pressure regulators series REGTRONIC have the job of precisely regulating the pressure in a system, the variables depending on the input command. Remote control regulators are controlled by means of an M12x1 cable and connector and can have Volt, mA, RS232 control or via IO-Link. Regulators with a display can be controlled via a cable or directly using the keys below the display. The pressure value and a series of information and diagnostics are visible at all times on the graphic display. The user-display interface, LEDs and buttons are all on one side. The programming and reading software is comprehensive, simple and intuitive. Pressure control takes place in a "closed-loop" with an electronic precision pressure sensor that measures the downstream pressure, a control system that compares it with the desired pressure, and two mini solenoid valves that adjust the pressure to reach the target value. Through the dedicated "Metal Work RegUp" App, the wireless versions can communicate with Ethernet networks (via MQTT protocol) and mobile devices (smartphones and tablets) via Bluetooth®. Through this App it is possible to view and modify the regulated pressure in real time, set all the operating parameters and view the pressure trend graphs.

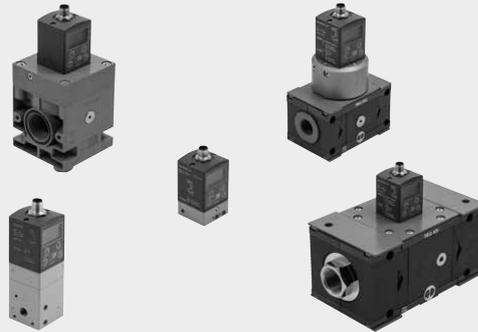

UNITS

PROPORTIONAL PRECISION PRESSURE REGULATOR REGTRONIC SERIES

TECHNICAL DATA	REGTRONIC		REGTRONIC NEW DEAL		REGTRONIC 300		REGTRONIC 400					
	M5	1/8"	1/4"	3/4"	1"	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	2"
Threaded port	M5											
Fluid	Filtered, unlubricated air. The air must be filtered at least 10 µm and without condensation.											
MIN inlet pressure	bar Regulation pressure + 1 bar											
MAX inlet pressure	bar 11											
Temperature range	°C from 0 to 50											
Pressure regulation range	bar from 0.05 to 10 (settable full scale and minimum pressure)											
Flow rate at 6.3 bar ΔP 0.5	10	1300	1500	10000	4500	18000	20000					
Flow rate at 6.3 bar ΔP 1	10	1450	1700	13000	7000	-	-					
Exhaust flow rate at 6.3 bar with 0.1 bar overpressure	2	600	1300	1800	250	400	400					
Exhaust flow rate at 6.3 bar with 0.5 bar overpressure	9	1000	1500	2000	500	850	850					
Response time with ΔP = 1 bar	Volume [cc]	100	100	1000	100	1000	1000	1000	1000	1000	1000	1000
from 6 to 7 bar	s	0.5	0.1	0.15	0.1	0.15	0.27	0.25	0.2	0.2	0.2	0.2
from 7 to 6 bar	s	0.55	0.1	0.15	0.1	0.15	0.27	0.33	0.35	0.35	0.35	0.35
Weight	kg	0.2	0.38	0.38	1.3	1.5	5	5	5	5	5	5.8
Class of protection	IP 65											
Supply voltage range IO-Link version	VDC from 18 to 30											
Current absorption	Max 150 mA at 18VDC											
Supply voltage range analog version	VDC 12 -10% 24 +30%											
Minimum operating voltage	VDC 10.8											
Maximum operating voltage	VDC 31.2											
Maximum admissible voltage	VDC 32 *											
Current absorption	max 220 mA at 12VDC											
Input signal (input impedance)	Voltage 0 to 5 VDC, 0 to 10 VDC (approx. 6.3 KΩ)											
	Current 4 to 20 mA (approx. 100 Ω)											
Serial ports	Manual RS 232 Keypad											
Output signal	Analog version voltage 0 to 10 VDC (1 VDC = 1 bar) - 1 mA max Analog version current 4 to 20 mA (4 mA = 0 bar, 20 mA = 10 bar) Digital PNP open collector output: max 24VDC 60 mA NPN open collector output: max 24VDC 60 mA											
Hysteresis	± 0.2% (Full scale)											
Repeatability	± 0.2% (Full scale)											
Sensitivity/Dead-band	setting range 10 to 300 mbar											
Output pressure (display and keyboard version)	Accuracy ± 0.3% (Full scale)											
	Unit of measurement bar, MPa, psi											
Analog output accuracy	Minimum resolution 0.01 bar - 0.001 MPa - 0.01 psi											
Temperature characteristics	± 0.1% of the reading											
Installation position	max 2 mbar / °C											
Notes	In any position											
	The features shown refer to the static condition only. With air consumption on the output side, the pressure may vary. On all analog versions you can set the parameters using the software "MWRRegtronic" downloadable from the website www.metalwork.eu; to connect the PC to Regtronic you can use the cable code W0970513019.											

* IMPORTANT! Voltage greater than 32VDC will damage the system irreparably.



REMOTE-CONTROL VERSION



DISPLAY AND KEYBOARD VERSION



PROGRAMMABLE AND FLEXIBLE

Setting options:

- LANGUAGE
- UNIT OF MEASUREMENT
- TYPE OF INPUT
- TYPE OF DIGITAL OUTPUT
- DEAD-BAND
- FULL SCALE
- MINIMUM PRESSURE

The remote-control version of the Regtronic has two diagnostic LEDs.

The display version also has buttons for entering the various parameters.

PRECISION

Linearity
± 0.5 % (full scale)

Hysteresis
± 0.2 % (full scale)

Repeatability
± 0.2 % (full scale)

Sensitivity
range 10 to 300 mbar

IO-Link CONNECTOR 5-PIN M12x1

IO-Link



Pin	Signal	Description of Class A Port	Lead colour
1	L+	+24 VDC power supply	Brown
2	NC	/	White
3	L-	0 VDC power supply	Blue
4	C/Q	IO-Link communication	Black
5	NC	/	Gray

ANALOG CONNECTOR 8-PIN M12x1




Pin	Signal	Description	Lead colour
1	TX	RS232	White
2	RX	RS232	Brown
3	Pressure set	0 to 10 VDC / 0 to 5 VDC / 4 to 20 mA	Green
4	Digital out	NPN	Yellow
5	Analog out	Voltage version 0 to 10 VDC Current version 4 to 20 mA	Gray
6	Digital out	PNP	Pink
7	0 VDC	Power supply	Blue
8	+ VDC	Power supply	Red

UNITS


PROPORTIONAL PRECISION PRESSURE REGULATOR REGTRONIC SERIES

FUNCTION DIAGRAM

REGTRONIC M5

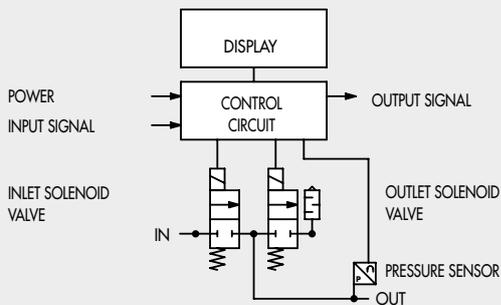

REGTRONIC 1/8" - 1/4" - SK300 - SK400 - NEW DEAL

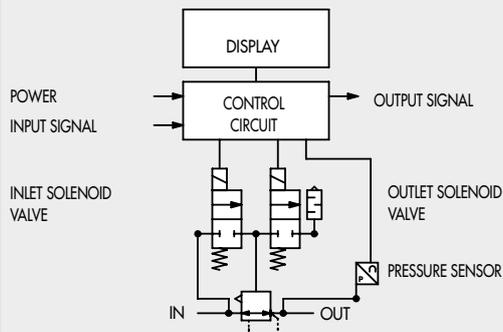


REGTRONIC M5


COMPONENTS



- ① BODY: painted aluminium
- ② PRESSURE SENSOR
- ③ SOLENOID VALVE: 10 mm series PLT-10
- ④ SHELL: technopolymer
- ⑤ CONNECTOR M12
- ⑥ ELECTRONIC BOARDS

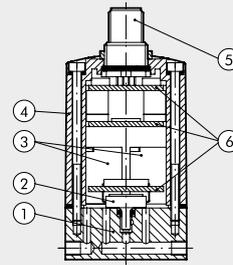


FLOW CHARTS

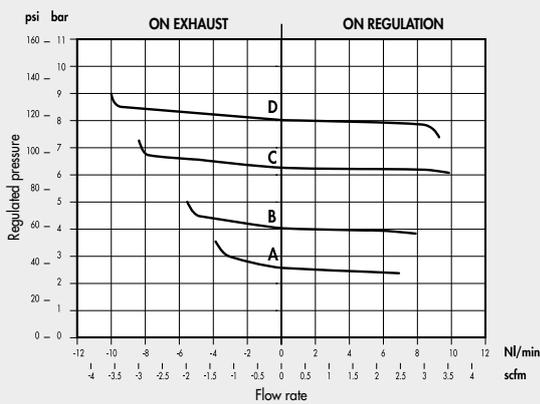


- A = 2.5 bar
- B = 4 bar
- C = 6.3 bar
- D = 8 bar
- Pm = 10 bar

FIXING OPTIONS

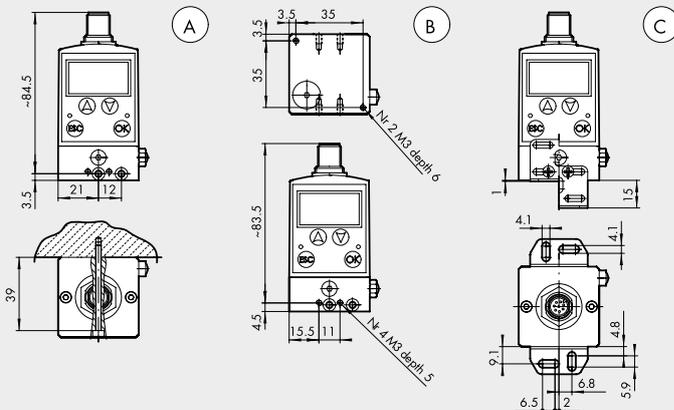

- A On the wall with 2 M3 screws, with through holes
- B On the wall using the M3 threaded holes on the front, rear and underside
- C On the wall with legs code 9200711

DIMENSIONS AND ORDERING CODES

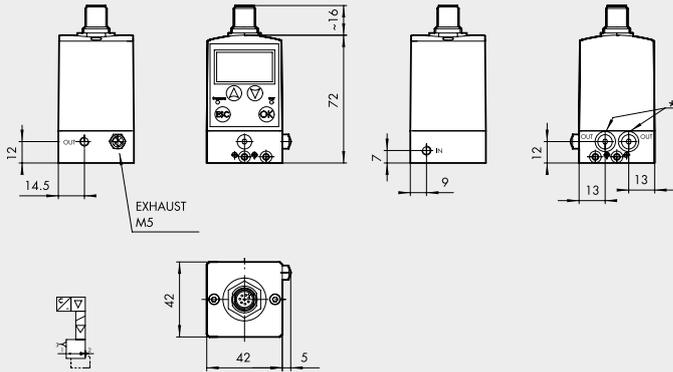


Code	Description
5520500	REGTRONIC M5 with display and keyboard OUT 0-10 V
5520502	REGTRONIC M5 remote control OUT 0-10 V
5540500	REGTRONIC M5 with display and keyboard OUT 4-20 mA
5540502	REGTRONIC M5 remote control OUT 4-20 mA
5530500	REGTRONIC IO-Link M5 with display and keyboard
5530502	REGTRONIC IO-Link M5 remote control

* alternative outputs, removing the M5 cap

ACCESSORIES

FIXING BRACKET KIT



Code	Description									
9200711	Regtronic M5 Fixing bracket kit									
A	B	C	F	I	I1	I2	I3	I4	I5	S
30	22	14.5	4.2	6.8	4.8	5.9	9.1	2	6.5	1.2

Note: supplied complete with four M3x6 screws

NOTES


UNITS

REGTRONIC M5

ACCESSORIES REGTRONIC ANALOG VERSION

IO-Link VERSION

CONNECTOR M12x1, 8-PIN, A-CODED, FEMALE, STRAIGHT




Code **Description**
W0970513010 Connector M12x1, 8-pin, A-coded, female, straight, with cable L = 5 m

Note: can only be used for analog version

Pin	Cable color
1	White
2	Brown
3	Green
4	Yellow
5	Grey
6	Pink
7	Blue
8	Red

CONNECTOR M12x1, 8-PIN, A-CODED, FEMALE, 90°, WITH CABLE




Code **Description**
W0970513011 Connector M12x1, 8-pin, A-coded, female, 90°, with cable L = 5 m

Note: can only be used for analog version

Pin	Cable color
1	White
2	Brown
3	Green
4	Yellow
5	Grey
6	Pink
7	Blue
8	Red

CONFIGURATION CABLE




Code **Description**
W0970513019 Configuration cable Regtronic

The cable consists of:
 - M12 8-PIN female connector to be connected to Regtronic
 - RS232 serial connector to be connected to PC
 - 2 wires to supply 24VDC power
 The package also includes a RS232-USB adapter

Note: can only be used for analog version

NOTES


CONNECTOR M12x1, 5-PIN, A-CODED, FEMALE, STRAIGHT



Code **Description**
W0970513001 Connector M12x1, 5-pin, A-coded, female, straight

Note: can only be used for version  IO-Link

CONNECTOR M12x1, 5-PIN, A-CODED, FEMALE, STRAIGHT



Code **Description**
W0970513002 Connector M12x1, 5-pin, A-coded, female, straight, with cable L = 5 m

Note: can only be used for version  IO-Link

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Gray


CONNECTOR M12x1, 5-PIN, A-CODED, FEMALE, 90°



Code **Description**
W0970513003 Connector M12x1, 5-pin, A-coded, female, 90°

Note: can only be used for version  IO-Link

CONNECTOR M12x1, 5-PIN, A-CODED, FEMALE, 90°, WITH CABLE



Code **Description**
W0970513004 Connector M12x1, 5-pin, A-coded, female, 90°, with cable L = 5 m

Note: can only be used for version  IO-Link

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black
5	Gray

UNITS

ACCESSORIES REGTRONIC

Accessories

	Art. No.	Type No.
Fixing brackets, 2 pieces incl. 4 M3 x 6 mm screws, for proportional prec. pressure regulator REGTRONIC, M5	153050	9200711
Straight socket M12 x 1 mm, 5-pin, for electrical connection cable	148191	W0970513001
Electrical connection cable with straight socket and 5 m cable, 5-wire, for service unit »ONE«	101132	533.901
90° angle socket M12 x 1 mm, 5-pin, for electrical connection cable	148239	W0970513003
Electrical connection cable with 90° angle socket and 5 m cable, 5-wire, for service unit »ONE«	101133	533.902