


Material: Galvanised steel (DIN 2353)

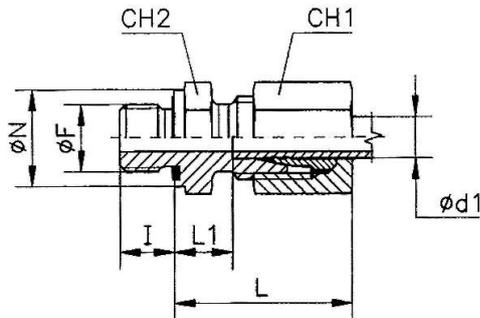

V 28-ZW

Male connector, parallel male thread and soft seal, light type

Art. No.	Type No.	Tube O.D.	PN	I	L	L1	CH1	Thread Ø F	Ø N	CH2
112249	V 25-ZW	6	315	8.0	23.0	8.5	14	G 1/8	14.0	14
112251	V 28-ZW	6	315	12.0	25.0	10.0	14	G 1/4	19.0	19
112255	V 33-ZW	6	315	12.0	26.0	11.5	14	G 3/8	22.0	22
112250	V 26-ZW	8	315	8.0	24.0	8.5	17	G 1/8	14.0	14
112252	V 29-ZW	8	315	12.0	25.0	10.0	17	G 1/4	19.0	19
112256	V 34-ZW	8	315	12.0	26.0	11.5	17	G 3/8	22.0	22
112260	V 38-ZW	8	315	14.0	27.0	12.0	17	G 1/2	27.0	27
112253	V 30-ZW	10	315	12.0	26.0	11.0	19	G 1/4	19.0	19
112257	V 35-ZW	10	315	12.0	27.0	12.5	19	G 3/8	22.0	22
112261	V 39-ZW	10	315	14.0	28.0	13.0	19	G 1/2	27.0	27
112254	V 31-ZW	12	315	12.0	26.0	12.0	22	G 1/4	19.0	19
112258	V 36-ZW	12	315	12.0	27.0	12.5	22	G 3/8	22.0	22
112262	V 40-ZW	12	315	14.0	28.0	13.0	22	G 1/2	27.0	27
112259	V 37-ZW	15	315	12.0	29.0	13.5	27	G 3/8	22.0	24
112263	V 41-ZW	15	315	14.0	29.0	14.0	27	G 1/2	27.0	27
112264	V 42-ZW	18	315	14.0	31.0	14.5	32	G 1/2	27.0	27
112265	V 43-ZW	18	315	16.0	30.0	14.5	32	G 3/4	32.0	32
112266	V 44-ZW	22	160	16.0	33.0	16.5	36	G 3/4	32.0	32

Dimensions are approximate when union nut is tightened.